

PRODUCT DATA SHEET

COB & CSP SERIES

COB 504LEDs/m 10W/m



ARC-RS-24-COBPRO-360




PRODUCT DATA SHEET

Product Features

1. No light dot, beautiful linear effect with big beam angle 180°.
2. Controlled by constant current IC, very stable.
3. Single end feed-in 15M, double ends with 30M, no voltage drop.
4. Warranty: 3 years.

CCT Option




Lighting Effect




Lighting Effect

PRODUCT DATA SHEET

IP Rating Option

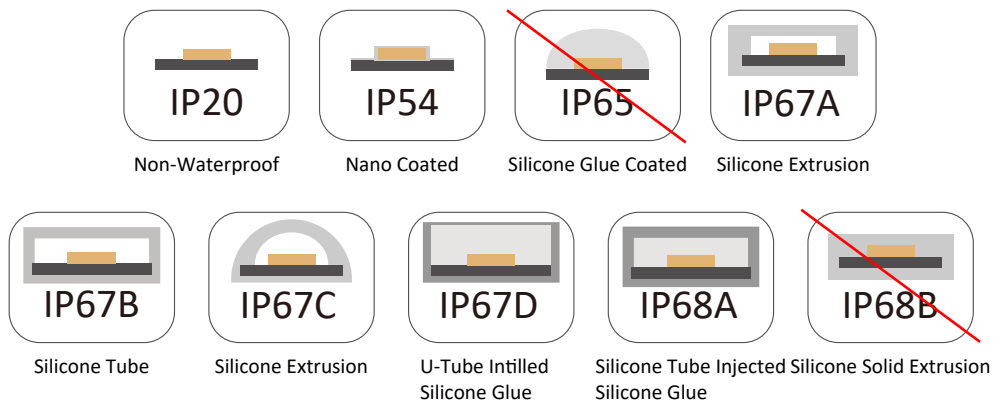

Dimension(mm/inch)

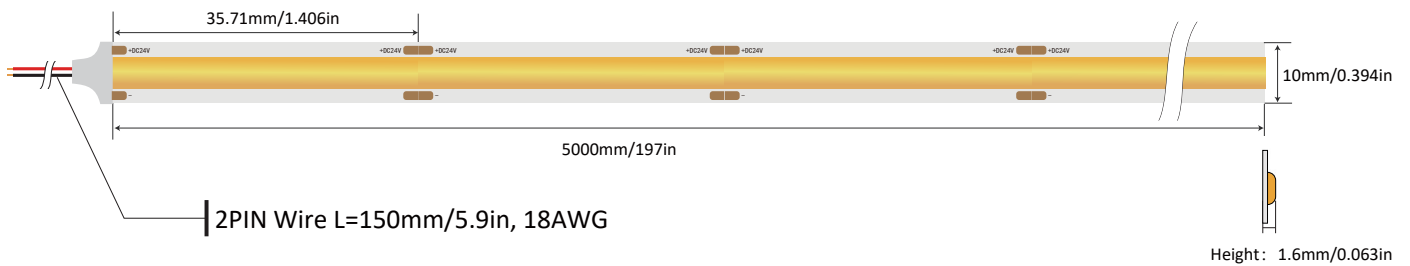

Length/Reel	Width	Height	LED Spacing	Min. Cutting
5000mm/197in	10mm/0.394in	1.6mm/0.063in	/	Every 35.71mm/ 1.406in (18LEDs)

Note:

Led strip length tolerance is $\pm 10\text{MM}$ based on 5M/roll, IP20 & IP54.

PRODUCT DATA SHEET

Data

Part Number	Working Voltage	Power	Current	LED Qty	CRI
ARC-RS-24-COBPRO-360	24V	10W/m	0.4169A/m	504LED/m	90+
		3.05W/ft	0.127A/ft	≈154LEDs/ft	

CCT (°K)	Luminous Efficiency	Lumen	Maximum Length
2700K	83lm/W	828m/m(252lm/ft)	15M(49.2ft)
3000K	83lm/W	828lm/m(252lm/ft)	15M(49.2ft)
4000K	87lm/W	872lm/m(266lm/ft)	15M(49.2ft)
6000K	87lm/W	872lm/m(266lm/ft)	15M(49.2ft)
Red/Green/Blue	/	/	/
1800K-2500K	/	/	/

Note:

The data base on IP20.

The Lumen output value tolerance is ±5% due to testing way.


The CCT tolerance is ±5% due to testing way.

Absolute Maximum Ratings


Parameter	Symbol	Value
Thermal Measurement Point	Tc	80°C/176°F
Operating Temperature	Topr	<80°C/<176°F
Storage Temperature	Ts	-20~+ 60°C/-68~140°F
Number of FPC Connection		

PRODUCT DATA SHEET

Wiring Diagram Application







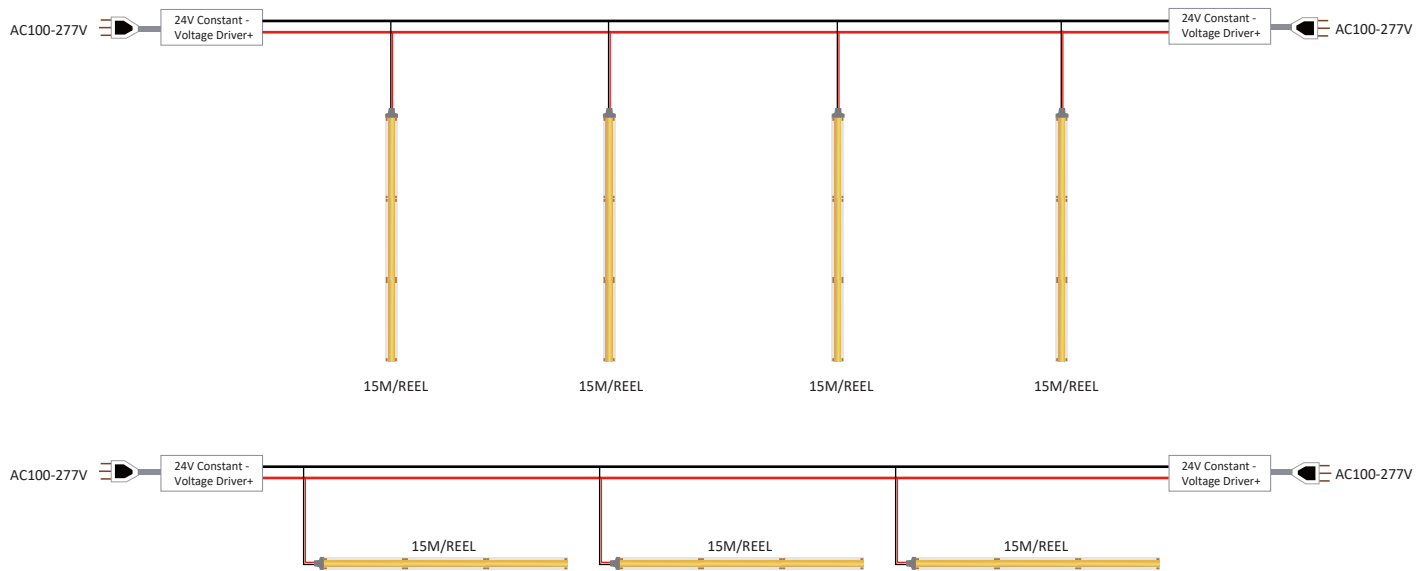


Packaging

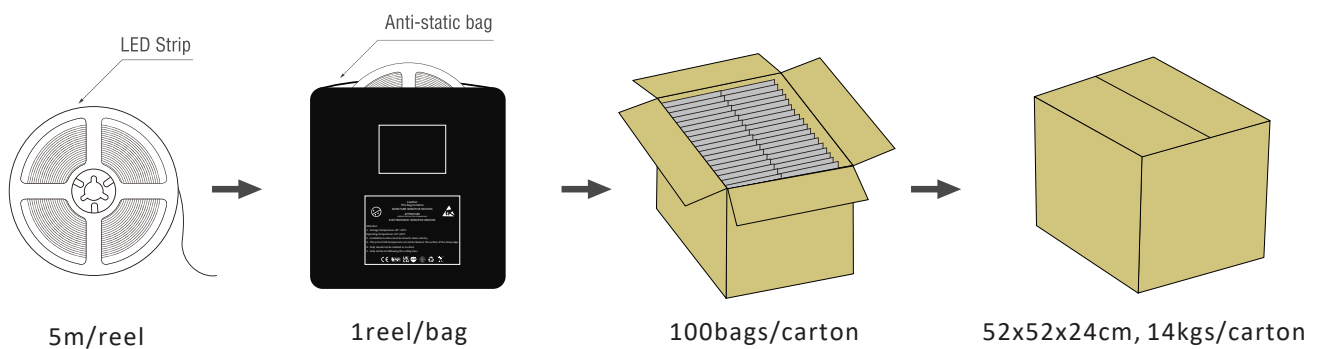

PRODUCT DATA SHEET

Cautions

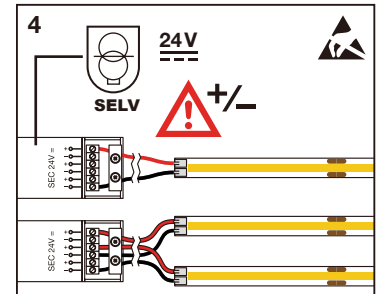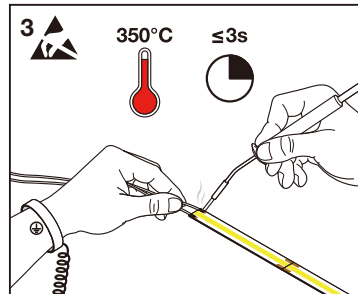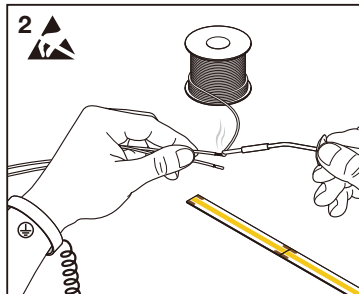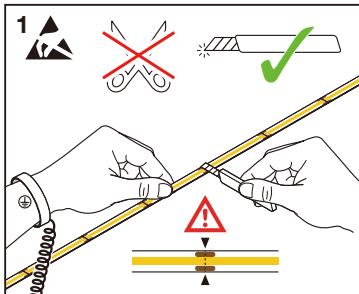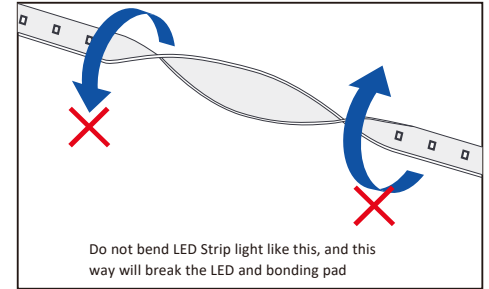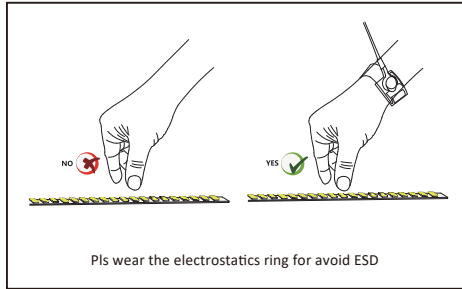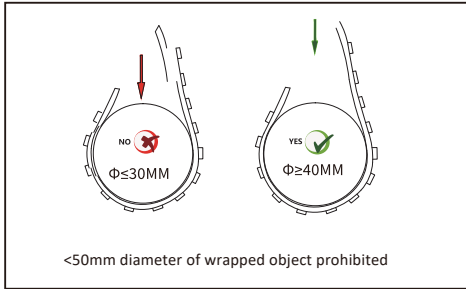

Safety & Disclosures

1. Do not install the led strip in environment where excessive heat may occur.
2. Only use copper wiring. Use wires rated for at least $176^{\circ}\text{F}(80^{\circ}\text{C})$ and certified for use with
3. Do not install IP20 LED strip products in outdoor / wet location environments.
4. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
5. Improper wire selection and installation could overheat wires, and cause fire.
6. Do not connect directly to high voltage or AC power.
7. Installation must be in accordance with local and national electrical code regulations.
8. To ensure safety and correct installation, our strips are intended to be installed by a qualified, licensed electrician.