

DIGITAL SPI COB SINGLE-COLOUR LED TAPE


24V | SPI CONTROL | 10W | CRI90

OVERVIEW

Flexible, high-output digital tape

A compact 24V linear lighting solution designed for precise, addressable single-colour control. The high-density 2216 LED layout provides a smooth, bright line of light, while the flexible double-layer copper PCB supports reliable installation and straightforward customisation.

cULus LISTED | E507355

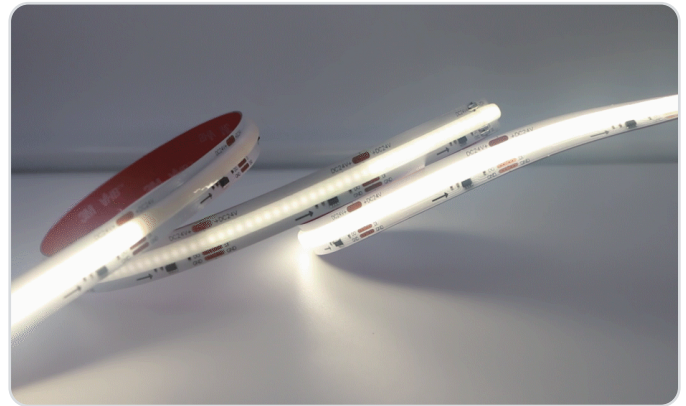

MAXIMUM RUN

10m

MINIMUM CUT

100mm

TAPE SIZE

12 x 2.2 mm

LED DENSITY

360 LEDs/m

LED STRIP LAYOUT



Signal direction indicated by arrows

PRODUCT FEATURES

- **SPI signal control**
Addressable digital control via WS2811F
- **High-density output**
360 LEDs per metre for a smooth light line
- **Robust PCB construction**
Double-layer 3 oz copper PCB
- **Low-voltage system**
Operates from a 24V DC constant-voltage supply
- **Five-year warranty**
Backed for professional installations

TECHNICAL SPECIFICATION

Input voltage	24V DC
Power	10W/m
Luminous flux	1,000 lm/m
CRI	Ra 90+
Driver IC	WS2811F
Pixels	20
IP rating	IP20

COLOUR TEMPERATURE OPTIONS

3000K WARM WHITE

4000K NATURAL WHITE

arc-led.co.uk