

ARC-NB-CYLINDEREND

Cylindrical End Downlight

5W

POWER

90+


CRI

IP20

INGRESS

48V

INPUT

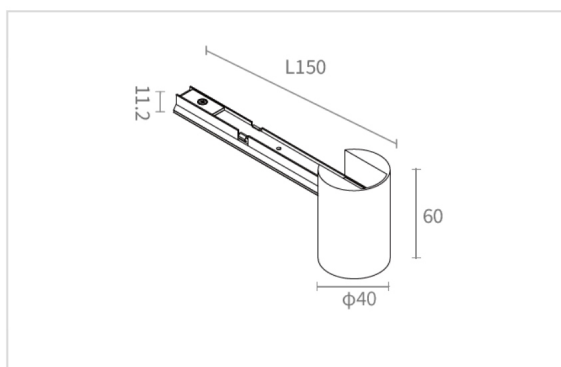

All dimensions in mm. Not to scale.

SPECIFICATION

ELECTRICAL

Power	5W
Input	48V DC 50/60Hz
Driver	48V Required

OPTICAL

CRI	90+
Colour Temp	3000-4000K
Beam Angle	36°
Lumens	304-305lm
LED Lifespan	50,000-hours

PHYSICAL

Face Ø	40mm
Depth	60mm
IP Rating	IP20
Material	Aluminum - AL6063

CONTROL

Dimming	On/off, 0-10V/DALI/Zigbee
Compatible drivers	48V Required

FEATURES

- Fits NanoBrite Tracks
- 3 Year warranty

ORDERING

ARC-NB-CYLINDEREND5W-3K-BLACK
ARC-NB-CYLINDEREND5W-3K-CHAMPAGNE GOLD
ARC-NB-CYLINDEREND5W-3K-CHAMPAGNE GOLD
ARC-NB-CYLINDEREND5W-4K-BLACK
ARC-NB-CYLINDEREND5W-4K-CHAMPAGNE GOLD
ARC-NB-CYLINDEREND5W-4K-WHITE

AVAILABLE FINISHES



Black



White



Champagne Gold

