
NANOBRITE

Magnetic Design. Limitless Light.

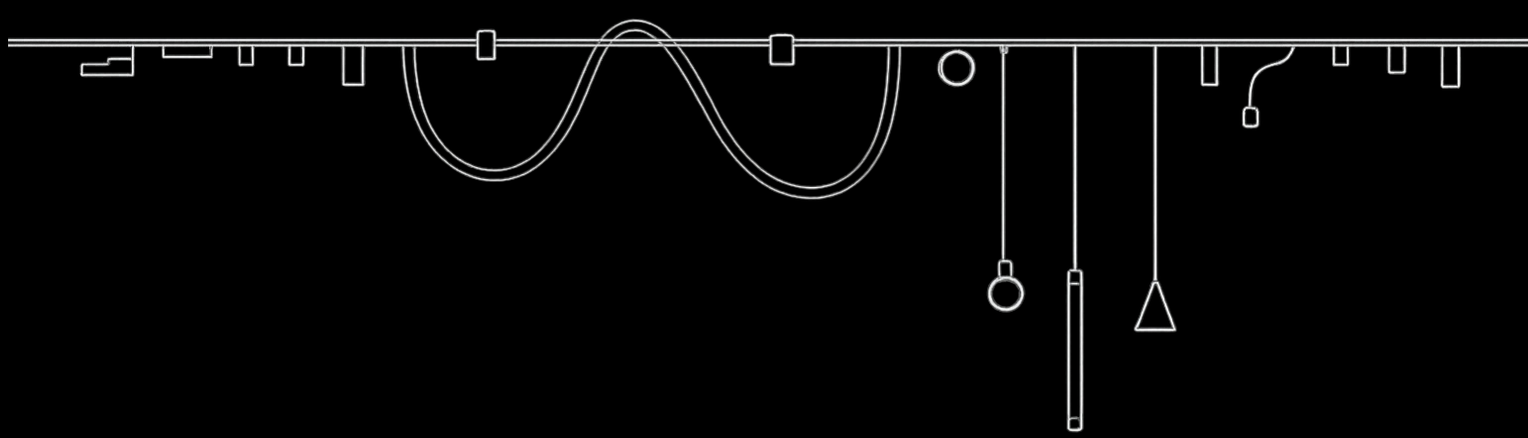

13·5 MAGNETIC TRACK SYSTEM

V2

///ArcLED

WHAT IS NANOBRITE?

NanoBrite is a 13.5mm low-profile magnetic track system from ArcLED. A single 48V platform that brings together spotlights, linear bars, pendants, grilles and reading fixtures under one consistent design language.

Eight product families. Three finishes. Fully interchangeable across the range, with surface, plaster-in recessed and suspended mounting options.

Designed for residential, hospitality and commercial interiors where considered lighting matters and supplied from UK stock with technical support at every stage of the project.

WHAT WE DO?

- 13.5mm low-profile track, 48V DC
- 120+ luminaires across eight product families
- Black, White and Champagne gold finishes
- 3000K and 4000K, CRI ≥ 90 throughout
- TRIAC, DALI-2 and Non-Dimming options
- Surface, plaster-in recessed and 1m suspended mounting
- Modular connectors, flexible joints and power couplers
- Full driver range from 60W to 360W
- DIALux files and photometric data on request



8 product families



Technical support




Trade pricing



Fast Turnaround

ARC-LED LIMITED, Drakes Court, Unit 4, Eagle Road, Plymouth, Devon, PL7 5JY
info@arc-led.co.uk | www.arc-led.co.uk

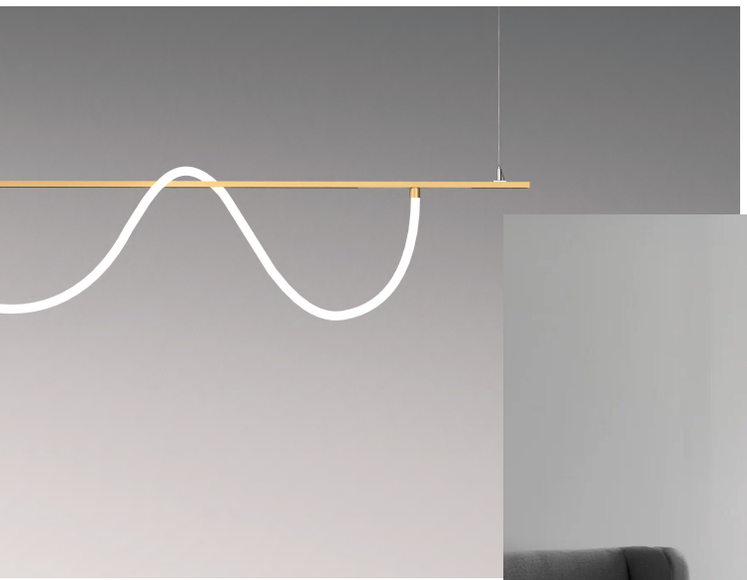









The collection, expanded.

New double-headed spotlights, suspended tube pendants and reading fixtures join the NanoBrite range for 2026, alongside a broader palette of finishes including champagne gold.

13.5mm housing.
Magnetic mount.

A 13.5mm housing depth and 19mm profile width. Each luminaire connects magnetically to the track - no tools, no visible fixings, fully repositionable.





Track specifications

Plaster in & Surface Mount Track

2000mm = 2m

Black

2000mm = 2m


White

2000mm = 2m


Champagne Gold (Surface and suspended only. For Suspended Options See Page 36

Diagram of track installation


ARC-NB-TR-SURF-2M
Surface Ceiling Track

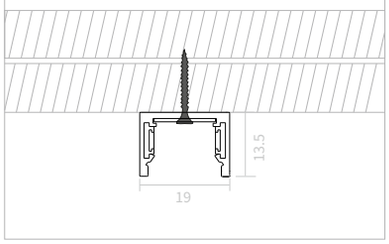

ARC-NB-TR-PB-2M
Plaster in Recessed Track

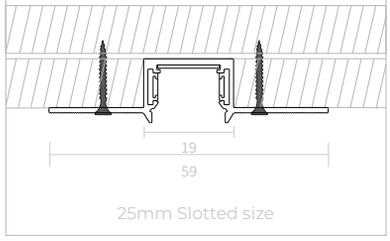

25mm Slotted size

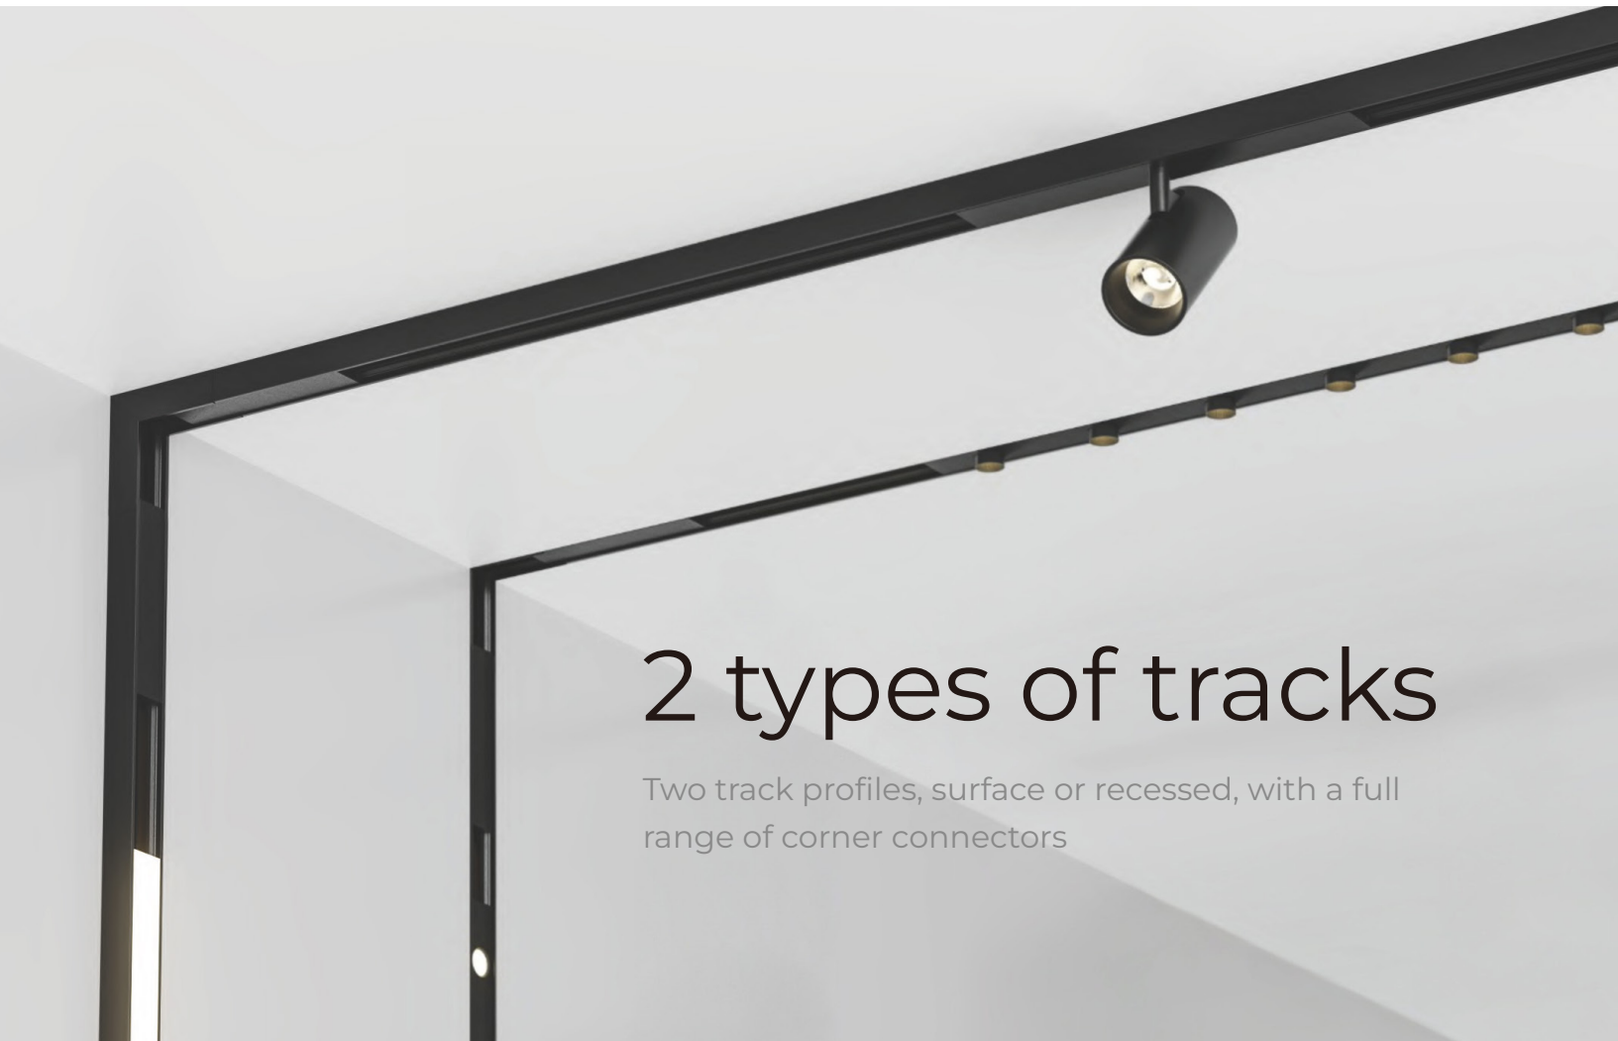


2 types of tracks

Two track profiles, surface or recessed, with a full range of corner connectors


Multiple modules

One track, every luminaire. Spots, linear bars, pendants and grilles all share the same magnetic mount and can be mixed across a single run.

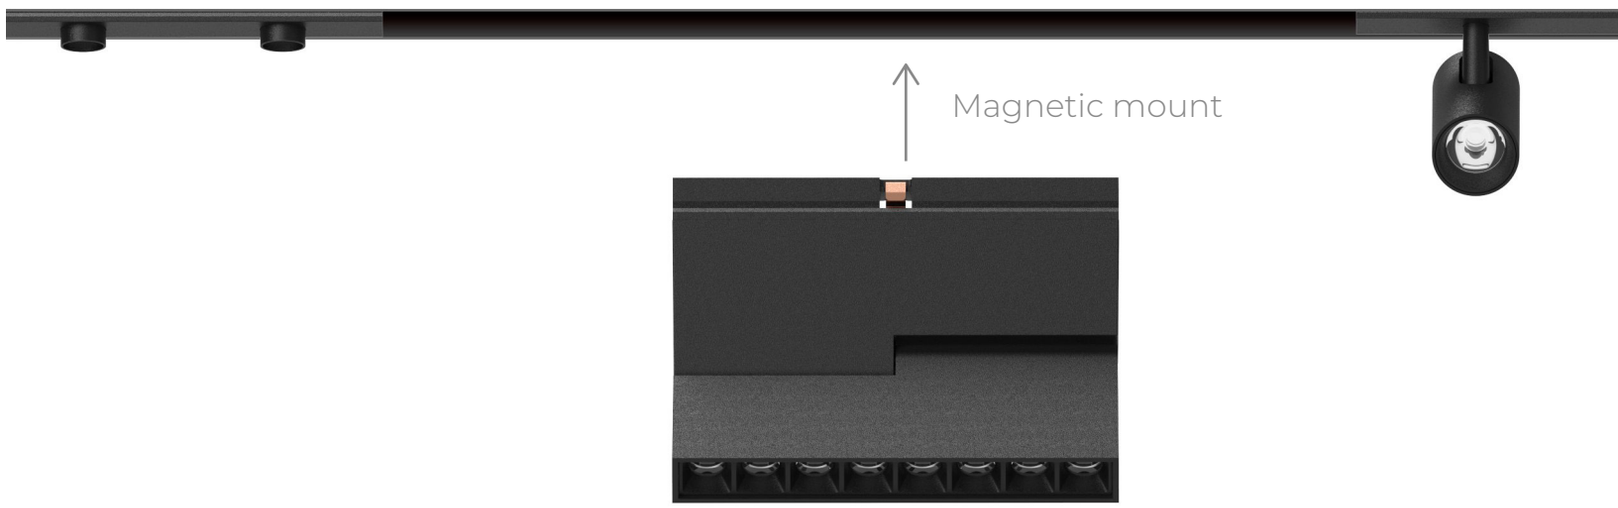

Stable and reliable

Each luminaire is held in place by high-strength neodymium magnets - secure under everyday vibration, easily repositioned when the scheme changes.

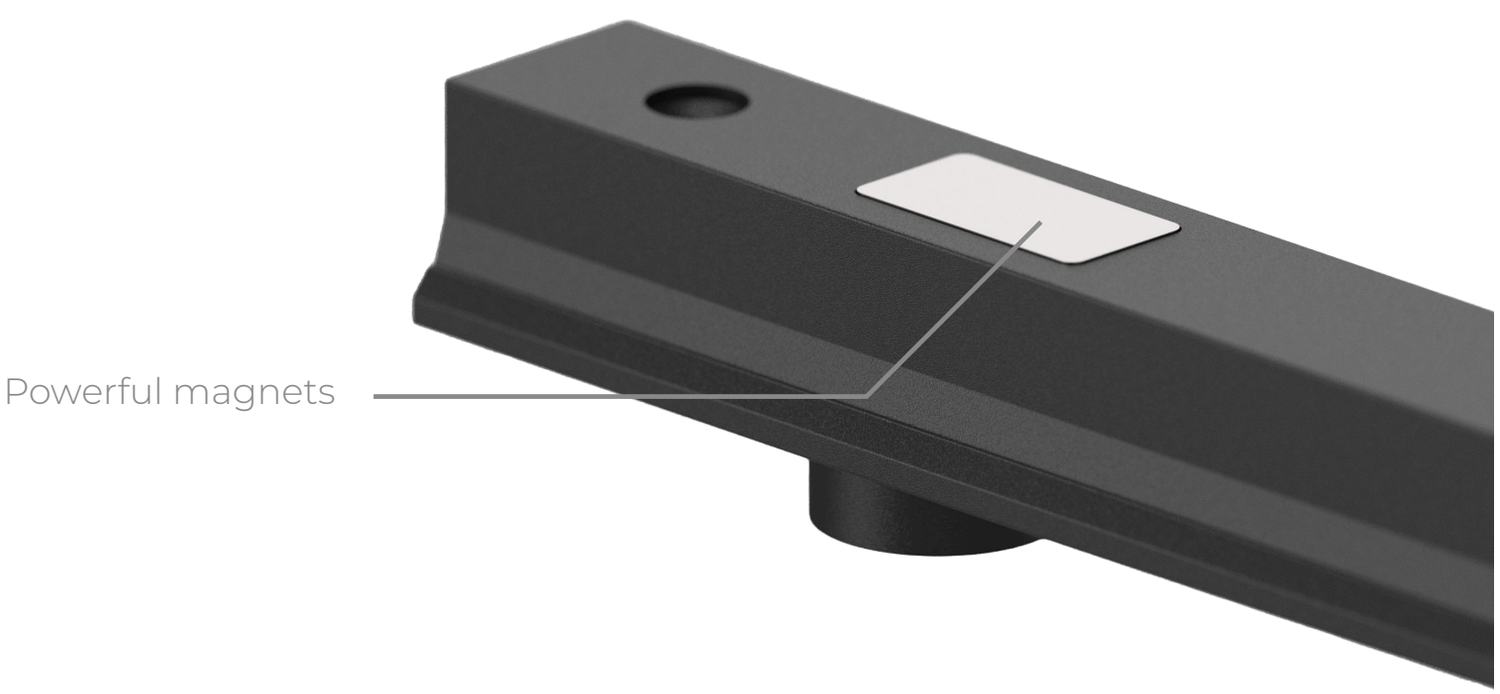



NANOBRITE

Magnetic Design. Limitless Light.



A

Low Glare Spot Light Bar

Model：ARC-NB-LGBAR



E

Adjustable Grille Light

Model：ARC-NB-CYLINDER



I

Sphere Light

Model：ARC-NB-SPHERE



B

Linear Bar Light

Model：ARC-NB-BAR



F

Sphere Flush Pendant

Model：ARC-NB-FLUSHSPHERE



J

Double-Headed Spotlights

Model：ARC-NB-2SPOT



C

Anti-Glare Spot Light Bar

Model：ARC-NB-SPBAR



G

Cone Hanging Light

Model：ARC-NB-CONE



K

Spotlights


Model ARC-NB-SPOT



D

Reading Light


Model：ARC-NB-READ




H

1.2m Suspension Track Attachments

Model：ARC-NB-STA-1.2

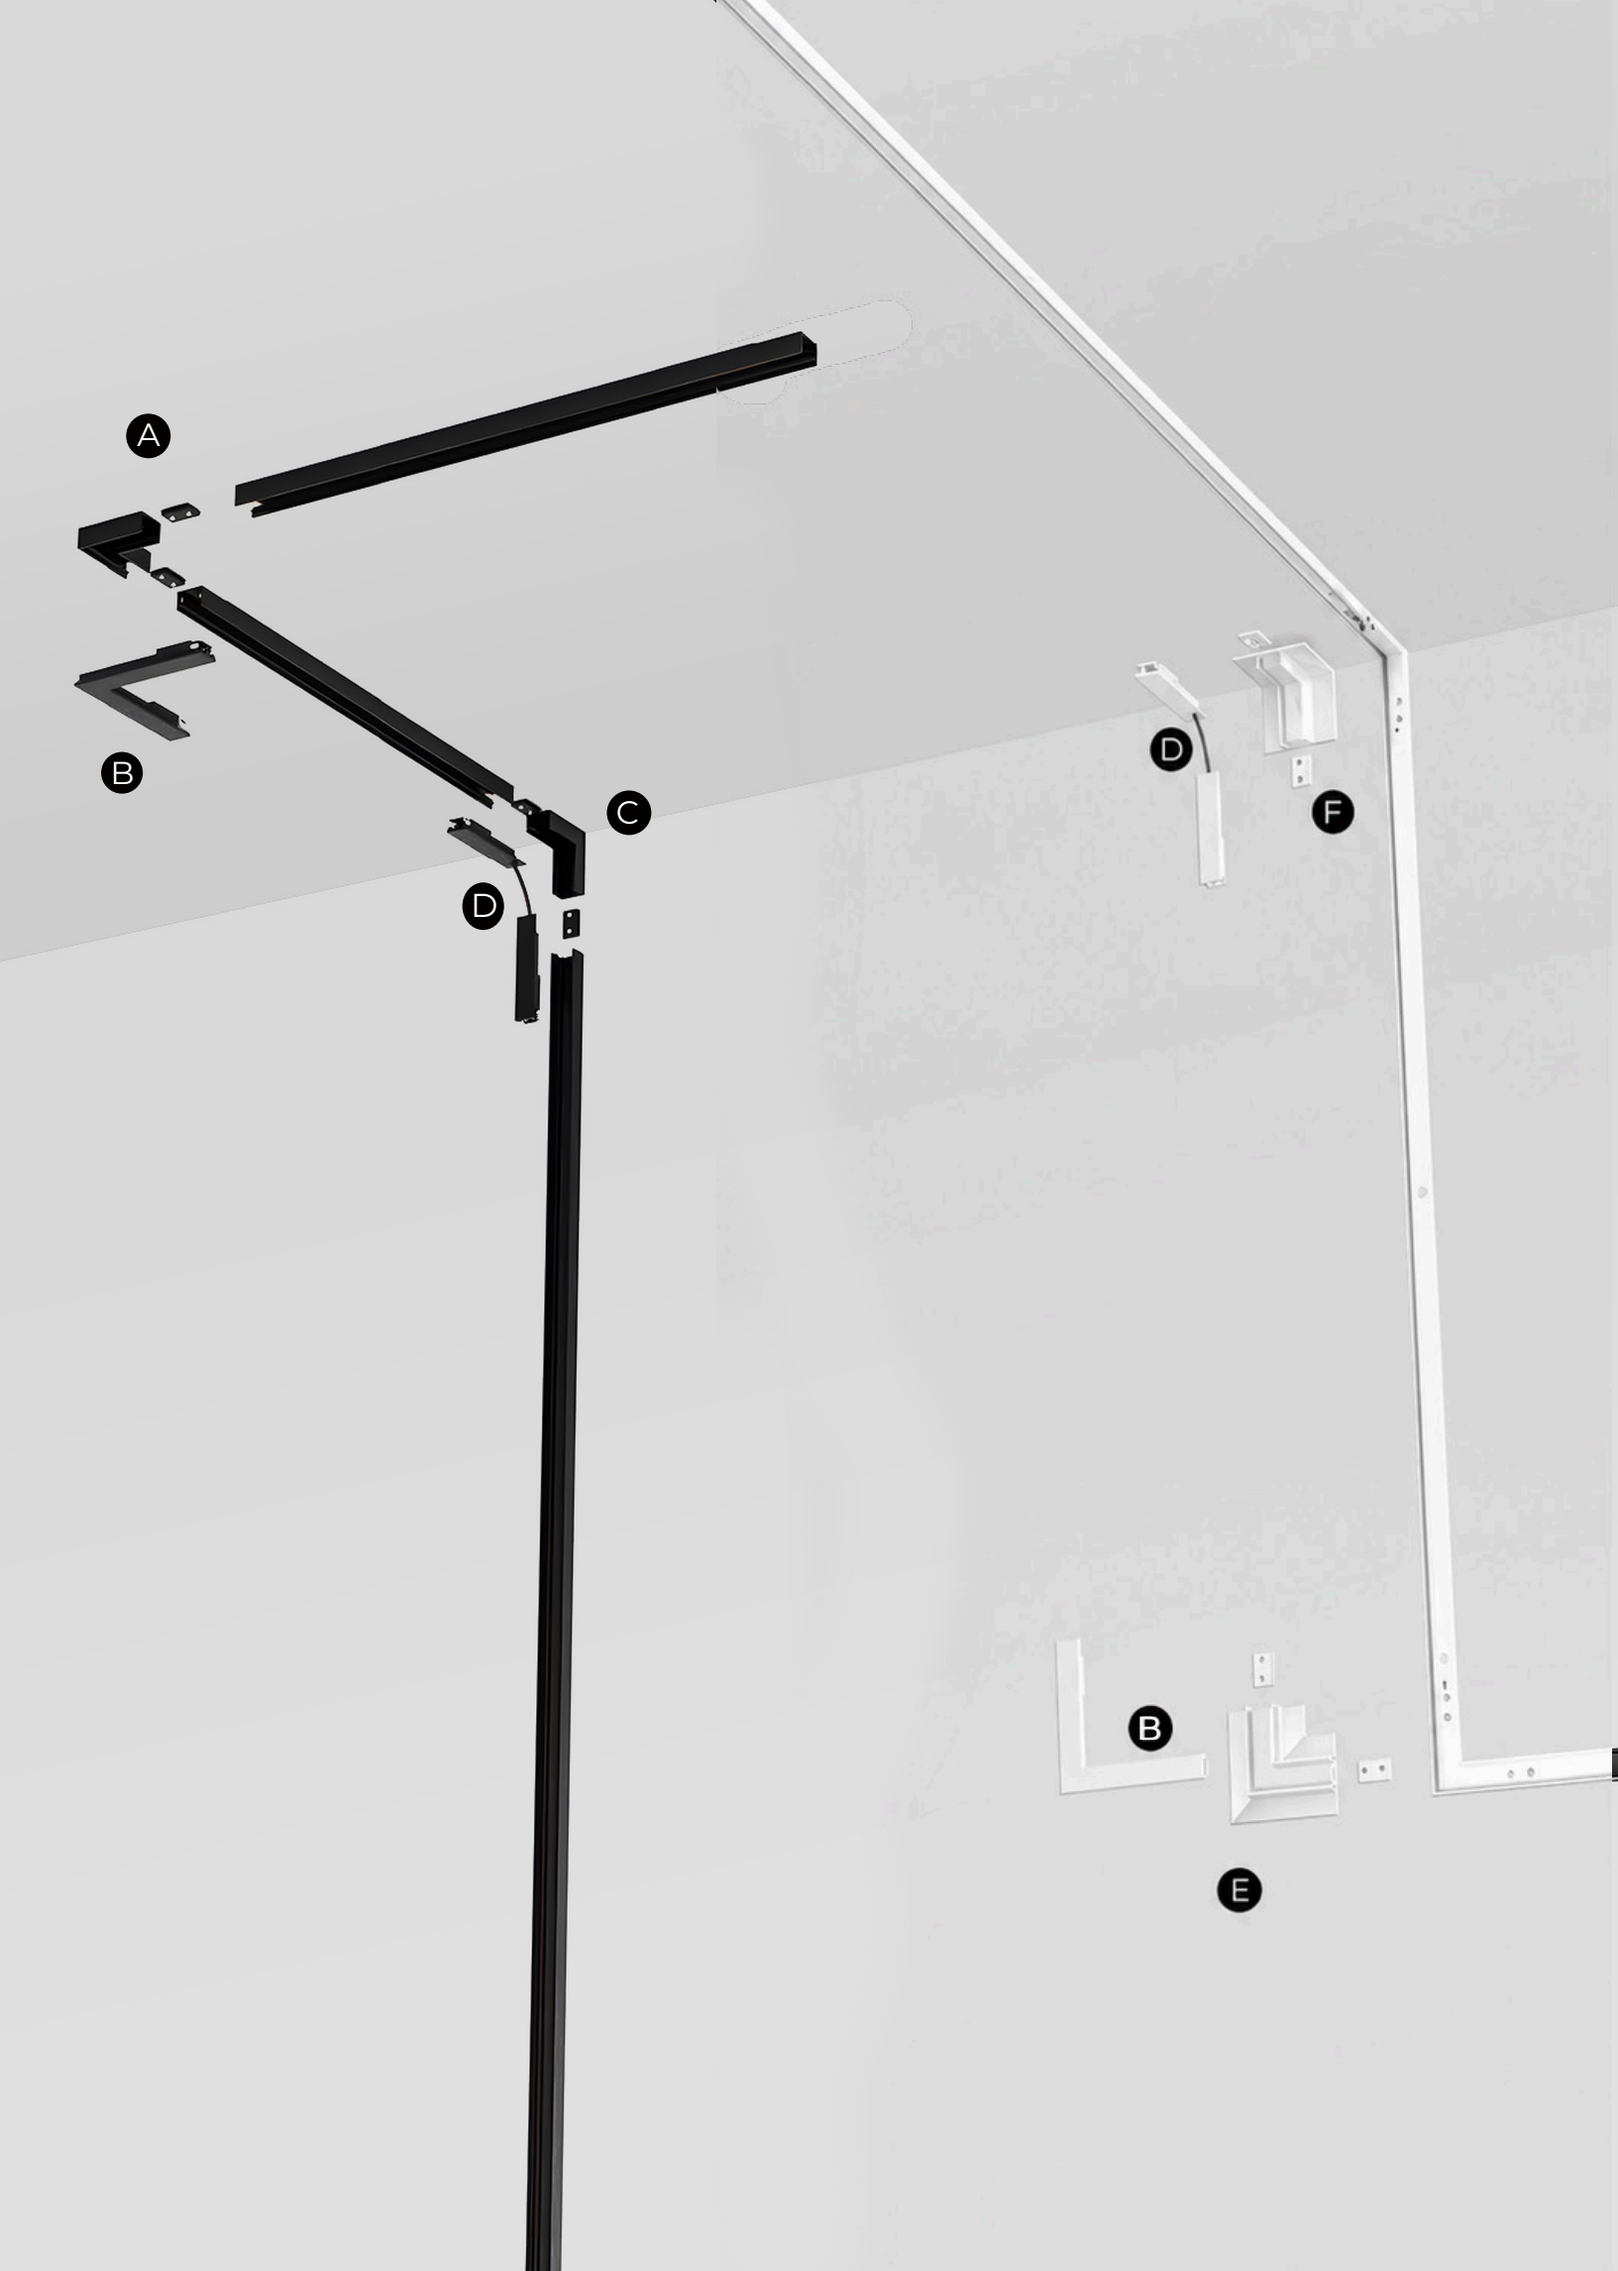
A
B
C
D
D
F
B
E

Surface Track



Model: ARC-NB-TR-SURF-2M-BLACK
ARC-NB-TR-SURF-2M-WHITE
ARC-NB-TR-SURF-2M-CHAMPAGNE GOLD



A

Surface 90° L Shape Connector

Model: ARC-NB-SURF90-BLACK
ARC-NB-SURF90-WHITE
ARC-NB-SURF90-CHAMPAGNE GOLD



B

90° degree Power Coupler

Model: ARC-NB-POW90-BLACK
ARC-NB-POW90-WHITE
ARC-NB-POW90-CHAMPAGNE GOLD



C

Surface Vertical L Connector

Model: ARC-NB-SURF-INT90-BLACK
ARC-NB-SURF-INT90-WHITE
ARC-NB-SURF-INT90-CHAMPAGNE GOLD




D


Flexible Power Coupler

Model: ARC-NB-POW-FLEXJOIN-BLACK
ARC-NB-POW-FLEXJOIN-WHITE
ARC-NB-POW-FLEXJOIN-CHAMPAGNE GOLD

Plaster in Recessed Track (Champagne Gold Not Available in plaster in profile)



Model: ARC-NB-TR-PB-2M-BLACK
ARC-NB-TR-PB-2M-WHITE



E

90° plaster in L Connector

Model: ARC-NB-90BEND-BLACK
ARC-NB-90BEND-WHITE



B

90° degree Power Coupler

Model: ARC-NB-POW90-BLACK
ARC-NB-POW90-WHITE



F

Plaster in Vertical L Connector

Model: ARC-NB-INT90-BLACK
ARC-NB-INT90-WHITE



D

Flexible Power Coupler

Model: ARC-NB-POW-FLEXJOIN-BLACK
ARC-NB-POW-FLEXJOIN-WHITE




Power Feed

Model: ARC-NB-POWFEED-BLACK
ARC-NB-POWFEED-WHITE
ARC-NB-POWFEED-CHAMPAGNE GOLD



Straight Power Coupler

Model: ARC-NB-POW-COUPLER-BLACK
ARC-NB-POW-COUPLER-WHITE
ARC-NB-POW-COUPLER-CHAMPAGNE GOLD



On/Off 100w Driver


Model: ARC-NB-100W-BLK
ARC-NB-100W-WHT




On/Off 150w Driver

Model: ARC-NB-150W-BLK
ARC-NB-150W-BLK

ALL OTHER DRIVERS AVAILABLE PLEASE SEE PAGE 42

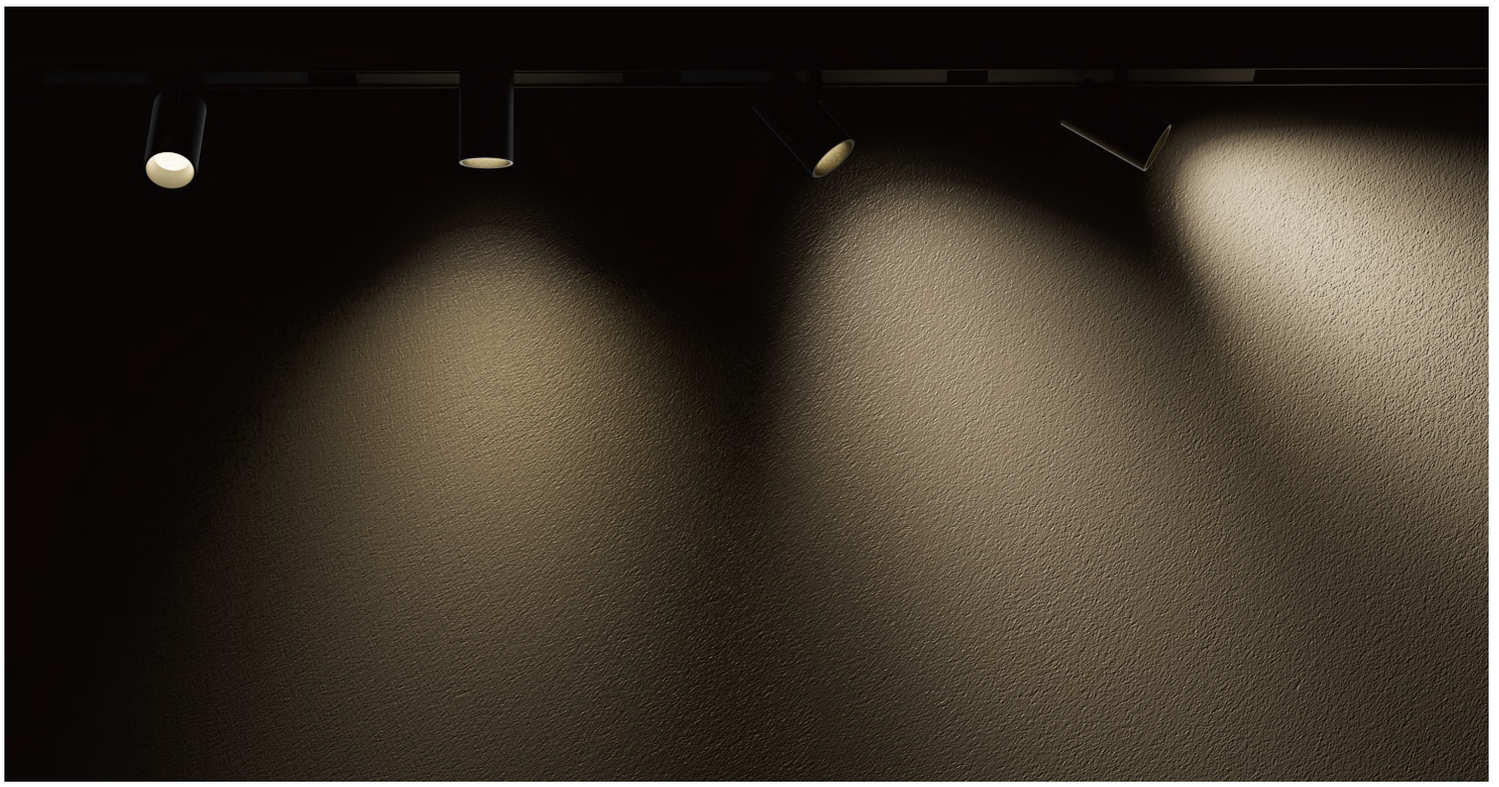

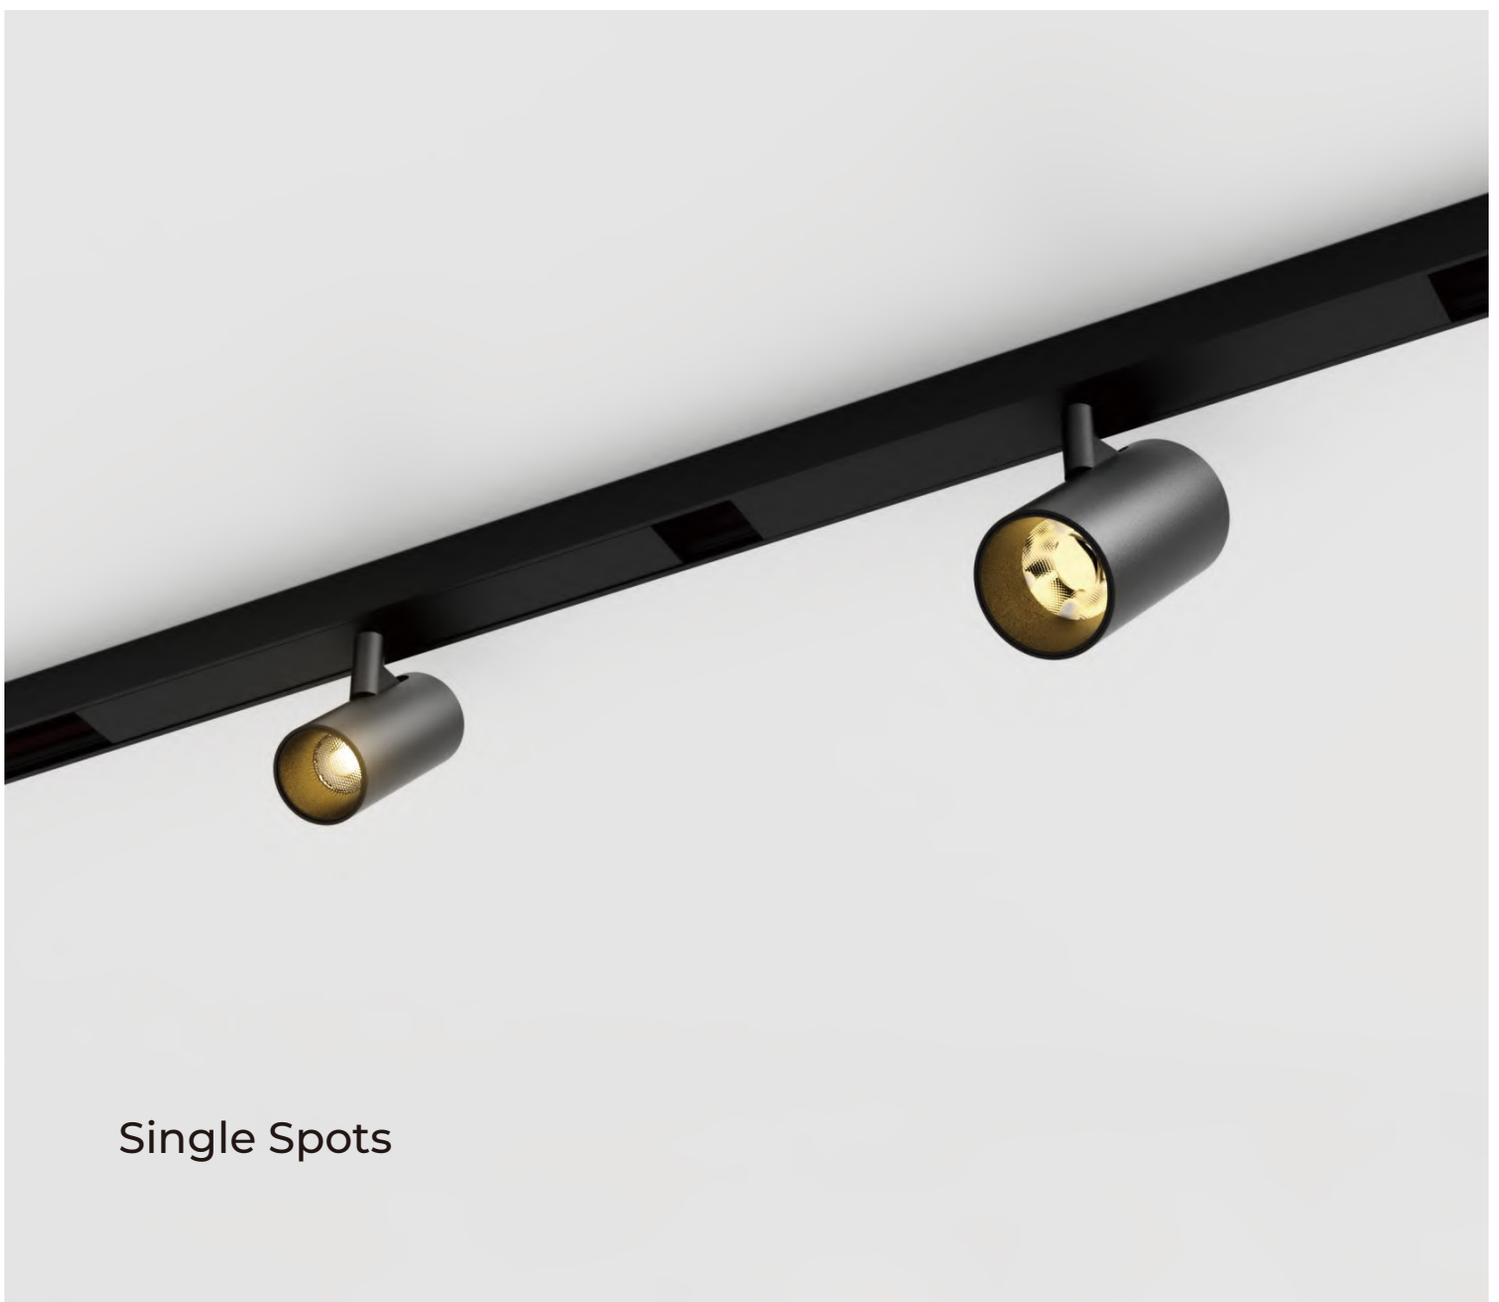

Single Spots

Single Spots



ARC-NB-SPOT3W

Power	Beam	Lumen	CCT	CRI	Finish	Code
3W	36°	132LM	3000K	90	Black	ARC-NB-SPOT3W-3K-BLACK
3W	36°	132LM	3000K	90	White	ARC-NB-SPOT3W-3K-WHITE
3W	36°	132LM	4000K	90	Black	ARC-NB-SPOT3W-4K-BLACK
3W	36°	132LM	4000K	90	White	ARC-NB-SPOT3W-4K-WHITE




ARC-NB-SPOT5W


Power	Beam	Lumen	CCT	CRI	Finish	Code
5W	36°	304LM	3000K	90	Black	ARC-NB-SPOT5W-3K-BLACK
		304LM	3000K	90	White	ARC-NB-SPOT5W-3K-WHITE
		304LM	3000K	90	Gold	ARC-NB-SPOT5W-3K-CHAMPAGNE GOLD
		305LM	4000K	90	Black	ARC-NB-SPOT5W-4K-BLACK
		305LM	4000K	90	White	ARC-NB-SPOT5W-4K-WHITE
		305LM	4000K	90	Gold	ARC-NB-SPOT5W-4K-CHAMPAGNE GOLD





ARC-NB-SPOT7W


Power	Beam	Lumen	CCT	CRI	Finish	Code
7W	36°	454LM	3000K	90	Black	ARC-NB-SPOT7W-3K-BLACK
		454LM	3000K	90	White	ARC-NB-SPOT7W-3K-WHITE
		454LM	3000K	90	Gold	ARC-NB-SPOT5W-3K-CHAMPAGNE GOLD
		480LM	4000K	90	Black	ARC-NB-SPOT7W-4K-BLACK
		480LM	4000K	90	White	ARC-NB-SPOT7W-4K-WHITE
		480LM	4000K	90	Gold	ARC-NB-SPOT5W-4K-CHAMPAGNE GOLD














*Light efficiency & Luminous flux parameters based on 3000K
Light source 4000K Light efficiency & Luminous flux=3000K*1.08

Basic Parameters

Material	AL6063
Coating	Anodised Aluminium
Adjustable angle	Vertical 90° / horizontal 350°
Size	Φ22x58mm Φ32x58mm Φ42x90mm


Coloured Spots

Coloured Spots



ARC-NB-BGSPOT-5W

Power	Beam	Lumen	CCT	CRI	Finish	Code
5W	36°	304LM	3000K	90	Black/Gold	ARC-NB-BGSPOT-5W-3K-BLACK
		305LM	4000K	90	Black/Gold	ARC-NB-BGSPOT-5W-4K-BLACK



ARC-NB-BGSPOT-7W

Power	Beam	Lumen	CCT	CRI	Finish	Code
7W	36°	454LM	3000K	90	Black/Gold	ARC-NB-BGSPOT-7W-3K-BLACK
		480LM	4000K	90	Black/Gold	ARC-NB-BGSPOT-7W-4K-BLACK




ARC-NB-WBSPOT-5W


Power	Beam	Lumen	CCT	CRI	Finish	Code
5W	36°	304LM	3000K	90	White/Black	ARC-NB-WBSPOT-5W-3K-WHITE
		305LM	4000K	90	White/Black	ARC-NB-WBSPOT-5W-4K-WHITE





ARC-NB-WBSPOT-7W

Power	Beam	Lumen	CCT	CRI	Finish	Code
7W	36°	454LM	3000K	90	White/Black	ARC-NB-WBSPOT-7W-3K-WHITE
		480LM	4000K	90	White/Black	ARC-NB-WBSPOT-7W-4K-WHITE









*Light efficiency & Luminous flux parameters based on 3000K
Light source 4000K Light efficiency & Luminous flux=3000K*1.08

Basic Parameters

Material	AL6063
	Anodised Aluminium
Adjustable angle	Vertical 90° / horizontal 350°
Size	Φ32x58mm Φ42x90mm


Twin Spots

Twin Spots




ARC-NB-2SPOT3W

Power	Beam	Lumen	CCT	CRI	Finish	Code
2x3W	36°	132LM	3000K	90	Black	ARC-NB-2SPOT3W-3K-BLACK
		132LM	3000K	90	White	ARC-NB-2SPOT3W-3K-WHITE
		134LM	4000K	90	Black	ARC-NB-2SPOT3W-4K-BLACK
		134LM	4000K	90	White	ARC-NB-2SPOT3W-4K-WHITE



ARC-NB-2SPOT5W

Power	Beam	Lumen	CCT	CRI	Finish	Code
2x5W	36°	304LM	3000K	90	Black	ARC-NB-2SPOT5W-3K-BLACK
		304LM	3000K	90	White	ARC-NB-2SPOT5W-3K-WHITE
		305LM	4000K	90	Black	ARC-NB-2SPOT5W-4K-BLACK
		305LM	4000K	90	White	ARC-NB-2SPOT5W-4K-WHITE



ARC-NB-TWINSPOT-BLACK/GOLD

Power	Beam	Lumen	CCT	CRI	Finish	Code
2x5W	36°	304LM	3000K	90	Black	ARC-NB-TWINSPOT-5W-3K-BLACK/GOLD
		305LM	4000K	90	Black	ARC-NB-TWINSPOT-5W-4K-BLACK/GOLD
2x7W	36°	454LM	3000K	90	Black	ARC-NB-TWINSPOT-7W-3K-BLACK/GOLD
		480LM	4000K	90	Black	ARC-NB-TWINSPOT-7W-4K-BLACK/GOLD




ARC-NB-TWINSPOT-GOLD/BLACK


Power	Beam	Lumen	CCT	CRI	Finish	Code
2x5W	36°	304LM	3000K	90	Gold	ARC-NB-TWINSPOT-5W-3K-GOLD/BLACK
		305LM	4000K	90	Gold	ARC-NB-TWINSPOT-5W-4K-GOLD/BLACK
2x7W	36°	454LM	3000K	90	Gold	ARC-NB-TWINSPOT-7W-3K-GOLD/BLACK
		480LM	4000K	90	Gold	ARC-NB-TWINSPOT-7W-4K-GOLD/BLACK





ARC-NB-TWINSPOT-WHITE/BLACK

Power	Beam	Lumen	CCT	CRI	Finish	Code
2x5W	36°	304LM	3000K	90	White	ARC-NB-TWINSPOT-5W-3K-WHITE/BLACK
		305LM	4000K	90	White	ARC-NB-TWINSPOT-5W-4K-WHITE/BLACK
2x7W	36°	454LM	3000K	90	White	ARC-NB-TWINSPOT-7W-3K-WHITE/BLACK
		480LM	4000K	90	White	ARC-NB-TWINSPOT-7W-4K-WHITE/BLACK










*Light efficiency & Luminous flux parameters based on 3000K
Light source 4000K Light efficiency & Luminous flux=3000K*1.08

Basic Parameters

Material	AL6063
	Anodised Aluminium
Adjustable angle	Vertical 90° / horizontal 350°
Size	Φ32x58mm Φ42x90mm


Linear Light Bar

Linear Light Bar

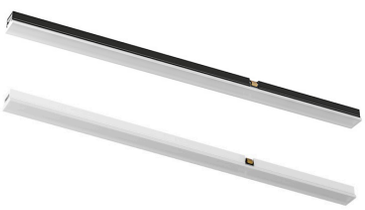


ARC-NB-BAR300


Power	Beam	Lumen	CCT	CRI	Finish	Code
5W	110°	147LM	3000K	90	Black	ARC-NB-BAR300-3K-BLACK
		147LM	3000K	90	White	ARC-NB-BAR300-3K-WHITE
		164LM	4000K	90	Black	ARC-NB-BAR300-4K-BLACK
		164LM	4000K	90	White	ARC-NB-BAR300-4K-WHITE





ARC-NB-BAR600

Power	Beam	Lumen	CCT	CRI	Finish	Code
10W	110°	448LM	3000K	90	Black	ARC-NB-BAR600-3K-BLACK
		448LM	3000K	90	White	ARC-NB-BAR600-3K-WHITE
		348LM	4000K	90	Black	ARC-NB-BAR600-4K-BLACK
		348LM	4000K	90	White	ARC-NB-BAR600-4K-WHITE









Basic Parameters

Material	AL6063
Coating	Anodised Aluminium
Size	300x15x11.5mm 600x15x11.5mm



Low Glare Spot Light Bar

Low Glare Spot Light Bar




ARC-NB-LGBAR300


Power	Beam	Lumen	CCT	CRI	Finish	Code
6W	45°	462LM	3000K	90	Black	ARC-NB-LGBAR300-3K-BLACK
		462LM	3000K	90	White	ARC-NB-LGBAR300-3K-WHITE
		504LM	4000K	90	Black	ARC-NB-LGBAR300-4K-BLACK
		504LM	4000K	90	White	ARC-NB-LGBAR300-4K-WHITE





ARC-NB-LGBAR600

Power	Beam	Lumen	CCT	CRI	Finish	Code
12W	45°	941LM	3000K	90	Black	ARC-NB-LGBAR600-3K-BLACK
		941LM	3000K	90	White	ARC-NB-LGBAR600-3K-WHITE
		1057LM	4000K	90	Black	ARC-NB-LGBAR600-4K-BLACK
		1057LM	4000K	90	White	ARC-NB-LGBAR600-4K-WHITE









*Light efficiency & Luminous flux parameters based on 3000K
Light source 4000K Light efficiency & Luminous flux=3000K*1.08

Basic Parameters

Material	AL6063
Coating	Anodised Aluminium
Size	300x15x11.5mm 600x15x11.5mm



Anti Glare Spot Bar

Anti Glare Spot Bar




ARC-NB-LSBAR300


Power	Beam	Lumen	CCT	CRI	Finish	Code
6W	45°	413LM	3000K	90	Black	ARC-NB-LSBAR300-6W-3K-BLACK
		413LM	3000K	90	White	ARC-NB-LSBAR300-6W-3K-WHITE
		392LM	4000K	90	Black	ARC-NB-LSBAR300-6W-4K-BLACK
		392LM	4000K	90	White	ARC-NB-LSBAR300-6W-4K-WHITE





ARC-NB-LSBAR600

Power	Beam	Lumen	CCT	CRI	Finish	Code
12W	45°	766LM	3000K	90	Black	ARC-NB-LSBAR600-12W-3K-BLACK
		766LM	3000K	90	White	ARC-NB-LSBAR600-12W-3K-WHITE
		846LM	4000K	90	Black	ARC-NB-LSBAR600-12W-4K-BLACK
		846LM	4000K	90	White	ARC-NB-LSBAR600-12W-4K-WHITE



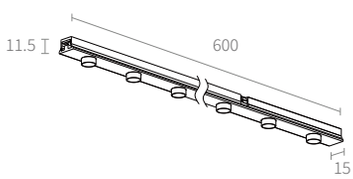






*Light efficiency & Luminous flux parameters based on 3000K
Light source 4000K Light efficiency & Luminous flux=3000K*1.08

Basic Parameters

Material	AL6063
Coating	Anodised Aluminium
Size	300x15x11.5mm 600x15x11.5mm

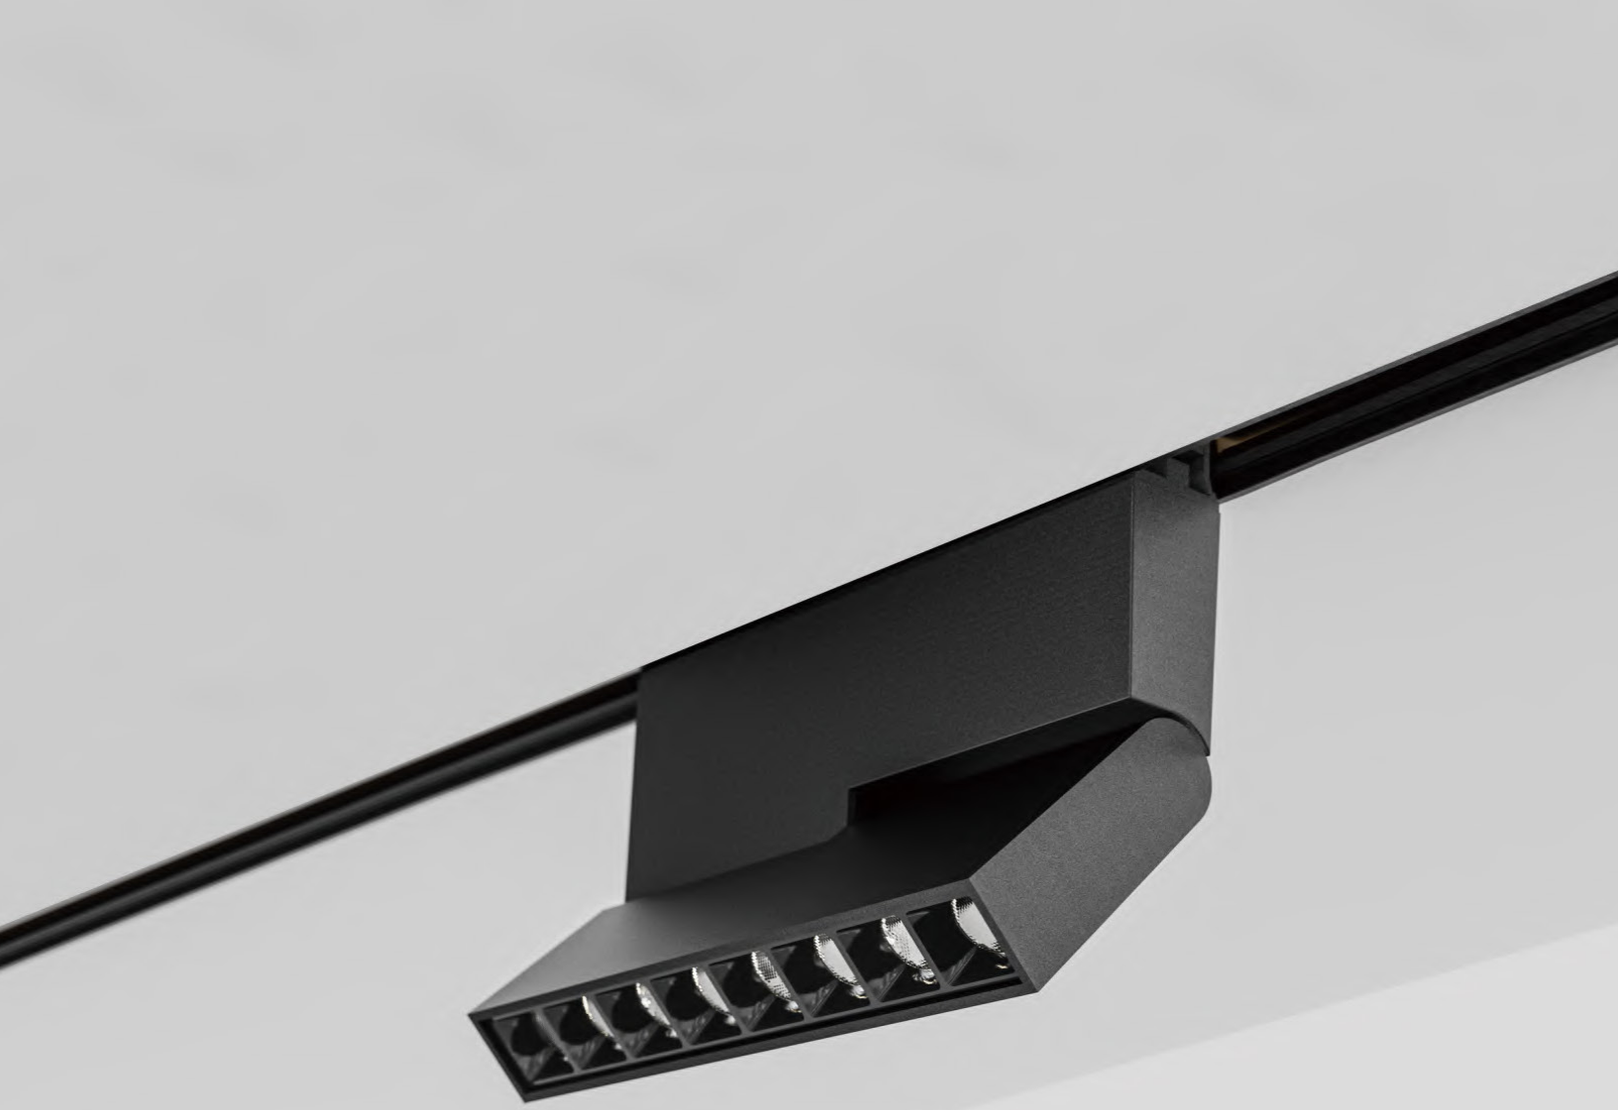

Tiltable Grill Light

Tiltable Grill Light




ARC-NB-LGTILT110


Power	Beam	Lumen	CCT	CRI	Finish	Code
6W	40°	519LM	3000K	90	Black	ARC-NB-LGTILT110-3K-BLACK
		519LM	3000K	90	White	ARC-NB-LGTILT110-3K-WHITE
		454LM	4000K	90	Black	ARC-NB-LGTILT110-4K-BLACK
		454LM	4000K	90	White	ARC-NB-LGTILT110-4K-WHITE





ARC-NB-LGTILT220

Power	Beam	Lumen	CCT	CRI	Finish	Code
12W	45°	1115LM	3000K	90	Black	ARC-NB-LGTILT220-3K-BLACK
		1115LM	3000K	90	White	ARC-NB-LGTILT220-3K-WHITE
		1200LM	4000K	90	Black	ARC-NB-LGTILT220-4K-BLACK
		1200LM	4000K	90	White	ARC-NB-LGTILT220-4K-WHITE









*Light efficiency & Luminous flux parameters based on 3000K
Light source 4000K Light efficiency & Luminous flux=3000K*1.08


Basic Parameters

Material	AL6063
Coating	Anodised Aluminium
Size	110x16x87mm 220x16x87mm




FLUSH SPHERE

Hanging Pendants



ARC-NB-SPHERE

Power	Beam	Lumen	CCT	CRI	Finish	Code
5W		212LM	3000K	90	Black	ARC-NB-SPHERE-3K-BLACK
		220LM	4000K	90	Black	ARC-NB-SPHERE-4K-BLACK




ARC-NB-CONE


Power	Beam	Lumen	CCT	CRI	Finish	Code
5W		282LM	3000K	90	Black	ARC-NB-CONE-3K-BLACK
		310LM	4000K	90	Black	ARC-NB-CONE-4K-BLACK



ARC-NB-FLUSHSPHERE

Power	Lumen	CCT	CRI	Finish	Code
3W	212LM	3000K	90	Black	ARC-NB-FLUSHSPHERE-3K-BLACK
	212LM	3000K	90	White	ARC-NB-FLUSHSPHERE-3K-WHITE
	212LM	3000K	90	Champagne gold	ARC-NB-FLUSHSPHERE-3K-GOLD
	220LM	4000K	90	Black	ARC-NB-FLUSHSPHERE-4K-BLACK
	220LM	4000K	90	White	ARC-NB-FLUSHSPHERE-4K-WHITE
	220LM	4000K	90	Champagne gold	ARC-NB-FLUSHSPHERE-4K-GOLD





Basic Parameters

Material	AL6063
	Anodised Aluminium
Adjustable angle	Direct illumination
Size	Φ80mm



Suspended
Spot


Suspended Spot




ARC-NB-SUSPEN

Power	CCT	CRI	Finish	Code
5W	3000K	90	Black	ARC-NB-PEN-3000K-BLACK
	3000K	90	White	ARC-NB-PEN-3000K-WHITE
	3000K	90	Champagne Gold	ARC-NB-PEN-3000K-GOLD
	4000K	90	Black	ARC-NB-PEN-4000K-BLACK
	4000K	90	White	ARC-NB-PEN-4000K-WHITE
	4000K	90	Champagne Gold	ARC-NB-PEN-4000K-GOLD

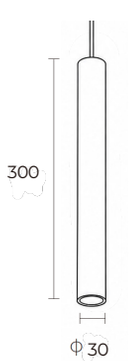





Basic Parameters

Material	AL6063
	Anodised Aluminium
Adjustable angle	Direct illumination
Size	Φ30x 300mm


Suspended
Tube Pendant

Suspended Tube Pendant



ARC-NB-SUSPEN

Power	CCT	CRI	Finish	Code
4W	3000K	90	Black	ARC-NB-SUSPEN-3K-BLACK
	3000K	90	White	ARC-NB-SUSPEN-3K-WHITE
	3000K	90	Champagne Gold	ARC-NB-SUSPEN-3K-GOLD
	4000K	90	Black	ARC-NB-SUSPEN-4K-BLACK
	4000K	90	White	ARC-NB-SUSPEN-4K-WHITE
	4000K	90	Champagne Gold	ARC-NB-SUSPEN-4K-GOLD



Basic Parameters

Material	AL6063
	Anodised Aluminium
Adjustable angle	Direct illumination
Size	Φ29 x 320mm



Tube Light

Tube Light



ARC-NB-ATMO

Power	CCT	CRI	Finish	Code
8W	3000K	90	Black	ARC-NB-ATMO-3K-BLACK
	3000K	90	White	ARC-NB-ATMO-3K-WHITE
	3000K	90	Gold	ARC-NB-ATMO-3K-CHAMPAGNE GOLD
	4000K	90	Black	ARC-NB-ATMO-4K-BLACK
	4000K	90	White	ARC-NB-ATMO-4K-WHITE
	4000K	90	Gold	ARC-NB-ATMO-4K-CHAMPAGNE GOLD

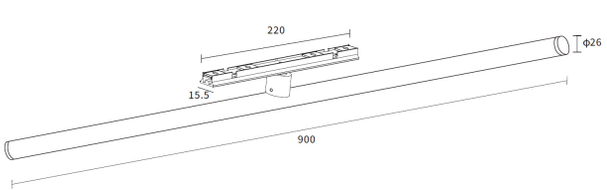

Basic Parameters

Material	AL6063
	Anodised Aluminium
Adjustable angle	Direct illumination
Size	Φ29 x 320mm



Reading Light

Reading Light



ARC-NB-READ

Power	CCT	CRI	Finish	Code
5W	3000K	90	Black	ARC-NB-READ-3K-BLACK
	3000K	90	White	ARC-NB-READ-3K-WHITE
	3000K	90	Champagne Gold	ARC-NB-READ-3K-GOLD
	4000K	90	Black	ARC-NB-READ-4K-BLACK
	4000K	90	White	ARC-NB-READ-4K-WHITE
	4000K	90	Champagne Gold	ARC-NB-READ-4K-GOLD

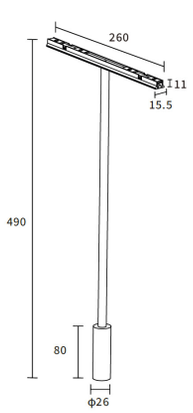

Basic Parameters

Material	AL6063 Anodised Aluminium
Adjustable angle	Direct illumination
Size	Φ29x 490mm


Atmosphere Light

Atmosphere Light




ARC-NB-SQUARE


Power	CCT	CRI	Finish	Code
5W	3000K	90	Black	ARC-NB-SQUARE-3K-BLACK
	3000K	90	White	ARC-NB-SQUARE-3K-WHITE
	3000K	90	Champagne Gold	ARC-NB-SQUARE-3K-CHAMPAGNE GOLD
	4000K	90	Black	ARC-NB-SQUARE-4K-BLACK
	4000K	90	White	ARC-NB-SQUARE-4K-CHAMPAGNE GOLD
	4000K	90	Champagne Gold	ARC-NB-SQUARE-4K-WHITE



ARC-NB-ROUND

Power	CCT	CRI	Finish	Code
5W	3000K	90	Black	ARC-NB-ROUND-3K-BLACK
	3000K	90	White	ARC-NB-ROUND-3K-WHITE
	3000K	90	Champagne Gold	ARC-NB-ROUND-3K-CHAMPAGNE GOLD
	4000K	90	Black	ARC-NB-ROUND-4K-BLACK
	4000K	90	White	ARC-NB-ROUND-4K-WHITE
	4000K	90	Champagne Gold	ARC-NB-ROUND-4K-CHAMPAGNE GOLD





Basic Parameters

Material	AL6063 Anodised Aluminium
Adjustable angle	Direct illumination



Suspension Track and Accessories

Suspension Track & Hangers

All surface track can be suspended using the correct fittings and suspension kits.
For best results we recommend limiting suspended runs to a maximum of 1.2m - beyond this, the cumulative weight of the fittings places undue load on the track. Longer runs are achievable where a cable-supported suspension joint is used.




ARC-NB-STA-1.2

Hanging length	Finish	Code
1200mm	Black	ARC-NB-STA-1.2-BLACK
1200mm	White	ARC-NB-STA-1.2-WHITE
1200mm	Champagne Gold	ARC-NB-STA-1.2-GOLD



ARC-NB-SUSPEN

Hanging length	Finish	Code
1200mm	Black	ARC-NB-SUSPEN-BLACK
1200mm	White	ARC-NB-SUSPEN-WHITE

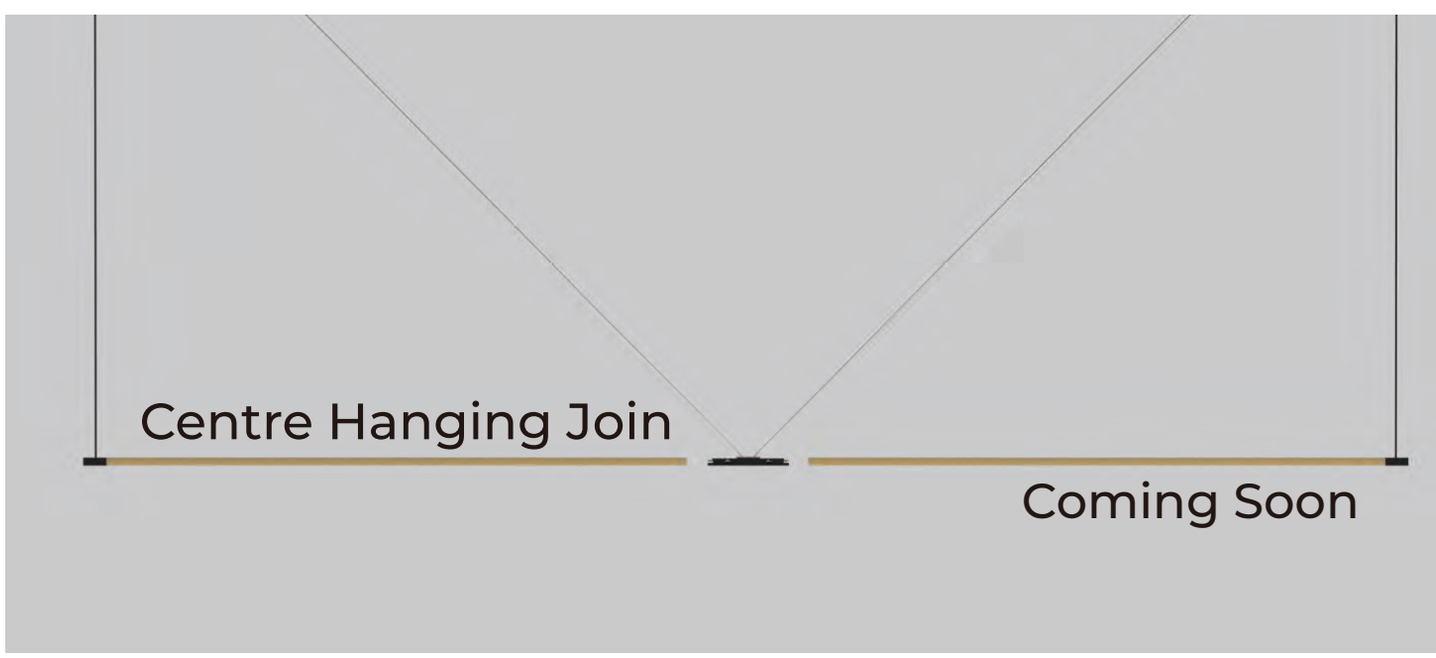



Cylinder Spots



ARC-NB-CYLINDER5W

Power	Beam	Lumen	CCT	CRI	Finish	Code
5W	36°	304LM	3000K	90	Black	ARC-NB-CYLINDER5W-3K-BLACK
		304LM	3000K	90	White	ARC-NB-CYLINDER5W-3K-WHITE
		304LM	3000K	90	Champagne Gold	ARC-NB-CYLINDER5W-3K-GOLD
		305LM	4000K	90	Black	ARC-NB-CYLINDER5W-4K-BLACK
		305LM	4000K	90	White	ARC-NB-CYLINDER5W-4K-WHITE
		305LM	4000K	90	Champagne Gold	ARC-NB-CYLINDER5W-4K-GOLD




ARC-NB-CYLINDER7W


Power	Beam	Lumen	CCT	CRI	Finish	Code
7W	36°	454LM	3000K	90	Black	ARC-NB-CYLINDER7W-3K-BLACK
		454LM	3000K	90	White	ARC-NB-CYLINDER7W-3K-WHITE
		454LM	3000K	90	Champagne Gold	ARC-NB-CYLINDER7W-3K-GOLD
		480LM	4000K	90	Black	ARC-NB-CYLINDER7W-4K-BLACK
		480LM	4000K	90	White	ARC-NB-CYLINDER7W-4K-WHITE
		480LM	4000K	90	Champagne Gold	ARC-NB-CYLINDER7W-4K-GOLD



ARC-NB-CYLINDEREND5W use with ARC-NB-SUSPEN

Power	Beam	Lumen	CCT	CRI	Finish	Code
5W	36°	304LM	3000K	90	Black	ARC-NB-CYLINDEREND5W-3K-BLACK
		304LM	3000K	90	White	ARC-NB-CYLINDEREND5W-3K-WHITE
		304LM	3000K	90	Champagne Gold	ARC-NB-CYLINDEREND5W-3K-GOLD
		305LM	4000K	90	Black	ARC-NB-CYLINDEREND5W-4K-BLACK
		305LM	4000K	90	White	ARC-NB-CYLINDEREND5W-4K-WHITE
		305LM	4000K	90	Champagne Gold	ARC-NB-CYLINDEREND5W-4K-GOLD

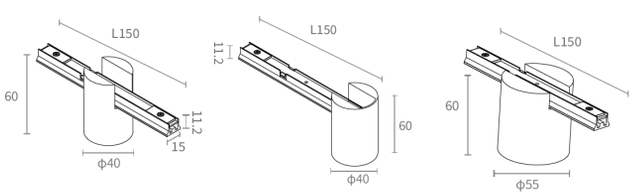

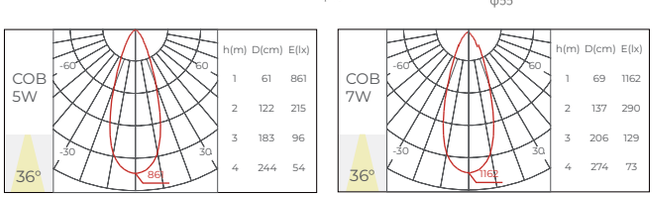

*Light efficiency & Luminous flux parameters based on 3000K
Light source 4000K Light efficiency & Luminous flux=3000K*1.08

Basic Parameters

Material	AL6063
	Anodised Aluminium
Adjustable angle	Vertical 90° / horizontal 350°
Size	Φ32x58mm Φ42x90mm



Rope Light

Rope Light



ARC-NB-ROPE

Power	CCT	CRI	Finish	Code
12W	3000K	90	Black	ARC-NB-ROPE-3K-BLACK
	3000K	90	White	ARC-NB-ROPE-3K-WHITE
	3000K	90	Champagne Gold	ARC-NB-ROPE-3K-GOLD
	4000K	90	Black	ARC-NB-ROPE-4K-BLACK
	4000K	90	White	ARC-NB-ROPE-4K-WHITE
	4000K	90	Champagne Gold	ARC-NB-ROPE-4K-GOLD

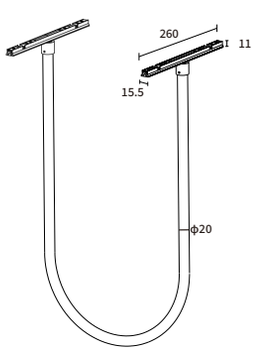

Basic Parameters

Material	AL6063 Anodised Aluminium
Adjustable angle	Direct illumination
Size	Φ20mm

TRIAC Dimmable Constant Voltage Drivers

ARC-NB	Model	Wattage	Input Voltage	Output Voltage	Output Current	Dimensions
	ELED-100P-48T	100w	200-240VAC	48w	2.09A	230 x 70 x 43 mm
	ELED-200P-48T	200w	200-240VAC	48w	4.16A	265 x 78 x 47 mm
	ELED-360P-48T	360w	200-240VAC	48w	7.5A	276 x 78 x 47 mm

DALI2 Dimmable LED Drivers

ARC-NB	Model	Wattage	Input Voltage	Output Voltage	Output Current	Dimensions
	ELED-60-48DP2	60w	200-240VAC	48w	1.25A	192.5 x 62 x 24 mm
	ELED-100-48DP2	100w	200-240VAC	48w	2.085A	231 x 78 x 25.1 mm
	ELED-200-48DP2	200w	200-240VAC	48w	4.175A	278 x 78 x 25.1 mm
	ELED-300-48DP2	300w	200-240VAC	48w	6.25A	301 x 78 x 25.1 mm

Non-Dimmable Drivers

ARC-NB	Model	Wattage	Input Voltage	Output Voltage	Output Current	Dimensions
	ELG-100-A-3Y	100w	200-240VAC	48w	1.46A	199 x 68 x 35.5mm
	ELG-150-48A-3Y	150w	200-240VAC	48w	3.13A	219 x 63 x 35.5mm
	ELG-200-48A-3Y	200w	200-240VAC	48w	4.16A	244 x71 x 37 mm
	ELG-240-48A-3Y	240w	200-240VAC	48w	5.0A	244 x 71 x 37 mm

Control Options

ARC-NB	Model	Input Voltage	Control Type	Dimensions
	NanoBrite Control Kit	48v	Wi-Fi, RF & Tuya	175 x 45 x 27 mm
	ARC-V1-L(WT)	48v	Wi-Fi, RF & Tuya	175 x 45 x 27 mm
	ARC-TSTP-BLK	100-240 VAC,50/60Hz	Wi-Fi, Zigbee & Tuya	4-inch multi-touch screen / 86 x 86 x 36.2mm
	ARC-TSTP-CC	100-240 VAC,50/60Hz	Wi-Fi, Zigbee & Tuya	8-inch multi-touch screen / resolution 1280×800
	ARC-TSTP-10	100-240 VAC,50/60Hz	Wi-Fi, Zigbee & Tuya	10.1-inch multi-touch screen / resolution 1920×1200

SCAN HERE TO SEE MORE ON THE PREMIUM TOUCH SMART SCREENS

ARC-V1-L(WT) - Maximum Wattage per channel: 48V 360W.





NANOBRITE

Magnetic Design. Limitless Light.

13·5 MAGNETIC TRACK SYSTEM

///ArcLED

///ArcLED, Drakes Court, Unit 4, Eagle Road, Plymouth, Devon, PL7 5JY United Kingdom
info@arc-led.co.uk | www.arc-led.co.uk

For special orders please contact your local sales team.