SPI 24V

125

ARC-24-SPI-RGB-WS2811

3838 140LEDs/M



· SPI digital led strip light.

· Applying SMD 3838RGB highlight LEDs, with external WS2811 IC, can achieve the effect of flowing water by controller.

· Suitable for advertising, hotel, bar, KTV, bridges, walls and other interior & exterior lighting project.

· Auto-addressable signal SPI led strip light.

· 2 years warranty.

CRI	Power	Color	Input Current	Light Eff.	Brightness	Maximum Length
/	7W/m(2.13W/ft)	Red	0.298A/m(0.091A/ft)	25lm/W	176lm/M(54lm/ft)	5M(1.524ft)
/	7W/m(2.13W/ft)	Green	0.298A/m(0.091A/ft)	68lm/W	489lm/M(149lm/ft)	5M(1.524ft)
/	7W/m(2.13W/ft)	Blue	0.298A/m(0.091A/ft)	17lm/W	123lm/M(37lm/ft)	5M(1.524ft)
/	18W/m(5.49W/ft)	Red/Green/Blue	0.773A/m(0.235A/ft)	41lm/W	760lm/M(232lm/ft)	5M(1.524ft)

Basic Parameters

Power	18W/m	5.49W/ft
Input Voltage	24VDC	24VDC
Input Current	0.773A/m	0.235A/ft
Cutting Unit	7LEDs/50mm	7LEDs/1.97in
Bead spacing	7.14mm	0.281in
Size	5000×10×1.9mm	197x0.394x0.075in
Bend Diameter	＞60mm	＞2.36in
Copper foil	2oz	2oz

Recommended Accessories

Controllers	RS-SC+R9	SP601E	K-1000C	K-8000C
Max. Connection Length	≤30M	≤25M*2CH	≤30M	≤30M*8CH

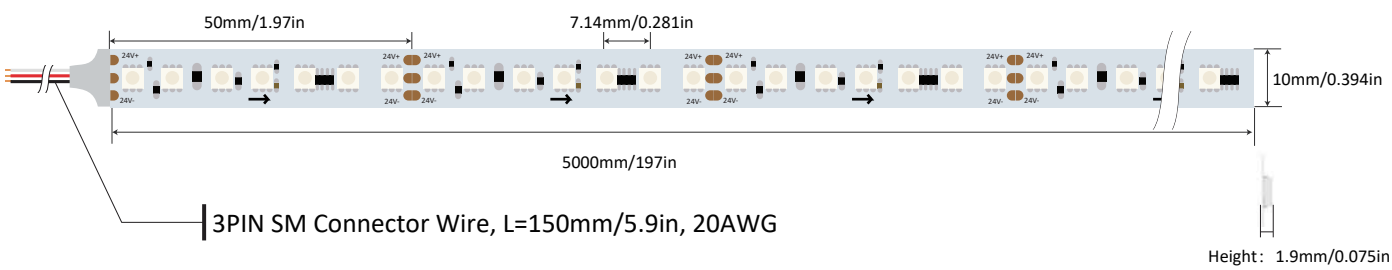

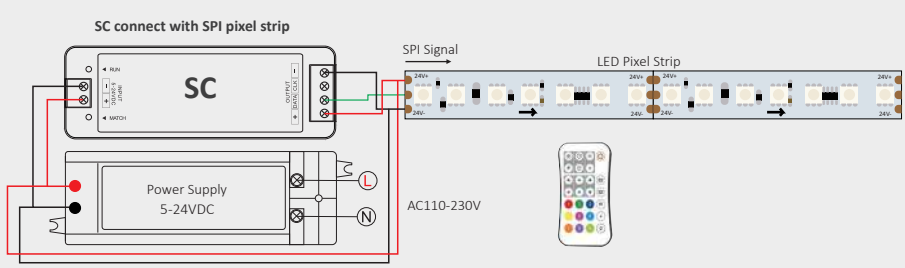

WS 2811F | IP54 | IP65 | IP67 | IP68 | 24V | 10 mm | 5M REEL